
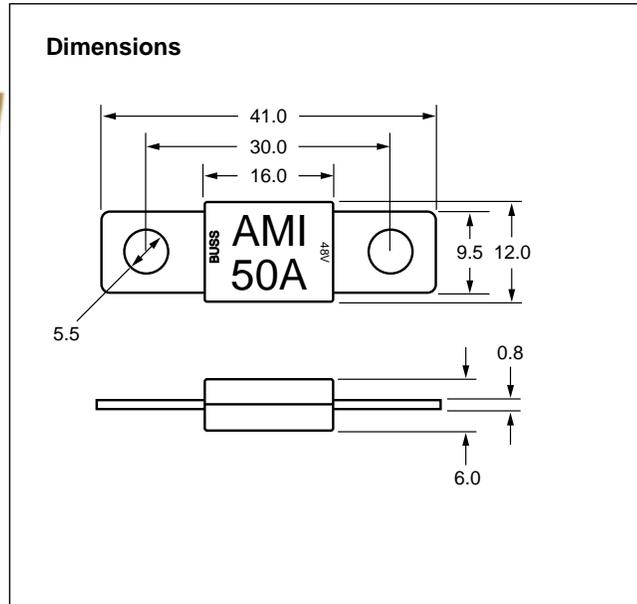


# Bolt In Automotive Fuses

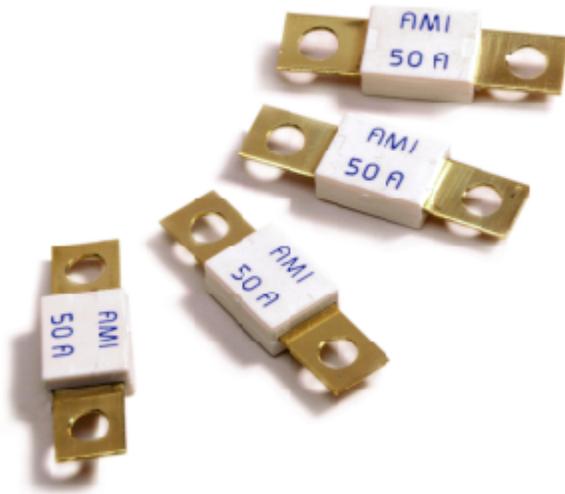

**SPECIFICATIONS**

**Bolt In Terminals:** 0.8mm thick blades for secure mounting.

**Material:** Tin plated brass terminals with UL rated 94VO white thermoplastic housing.

**Applications:** Power distribution protection for automotive systems on 48VDC or less systems requiring interrupting ratings up to 1000A.

**Time Current Specifications**

Amp Rating	150% of I <sub>N</sub>	200% of I <sub>N</sub>	300% of I <sub>N</sub>	500% of I <sub>N</sub>	100% I <sub>N</sub> Carry	Millivolt Drop @ 100% I <sub>N</sub>	Interrupting Capability
50	90-3600 sec.	5-100 sec.	0.3-10 sec.	0.1-1 sec.	Min. 100 hrs.	Max. 110 mV	1KA @ 48VDC
80							
100							

**PART NUMBERING SYSTEM**

**Series**      **Rating**

AMQ-qqq

050 - 50 amps  
 080 - 80 amps  
 100 - 100 amps