



# Limiter


## Very Fast-Acting

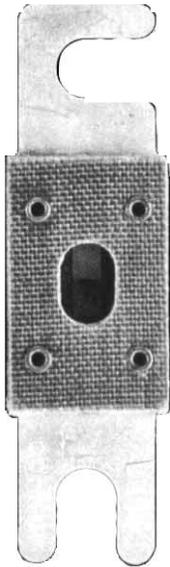

Dimensional Data

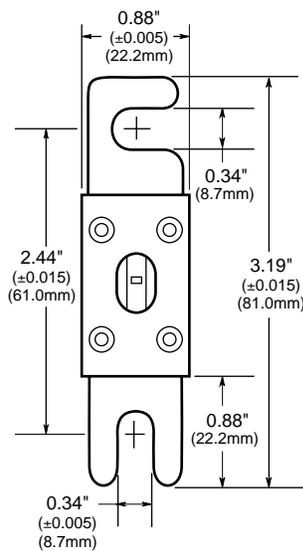

Time-Current Characteristic Curves—Average Melt

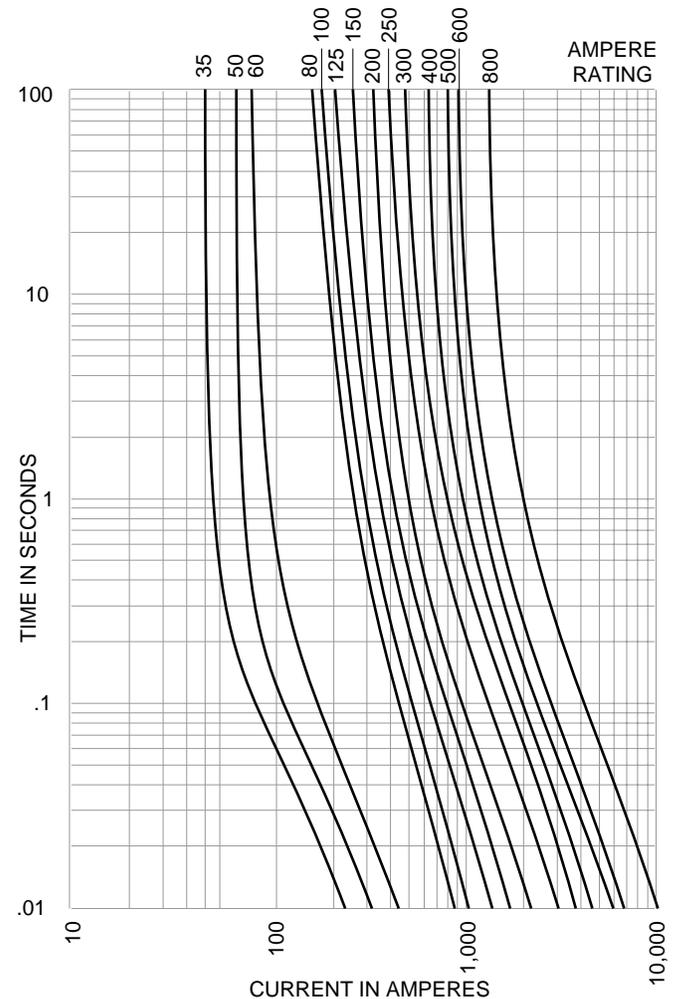

Catalog Symbol: ANN

Very Fast-Acting

Ampere Rating: 10 to 800 Amperes

Voltage Rating: 125 Volts AC (or less)

80 Volts DC (or less)

Interrupting Rating: 2,500 Amperes AC,

2,700 Amperes DC

Agency Approvals: U.L. Recognized, 35-400 Amps


Guide JFHR2, File E56412

Electrical Ratings (Catalog Symbol and Amperes)

125 Volts AC, IR 2500A @ 125V

ANN-10	ANN-90	ANN-225	ANN-400
ANN-35	ANN-100	ANN-250	ANN-500
ANN-40	ANN-125	ANN-275	ANN-600
ANN-50	ANN-150	ANN-300	ANN-700
ANN-60	ANN-175	ANN-325	ANN-800
ANN-80	ANN-200	ANN-350	—

Fuse Block No. 4164

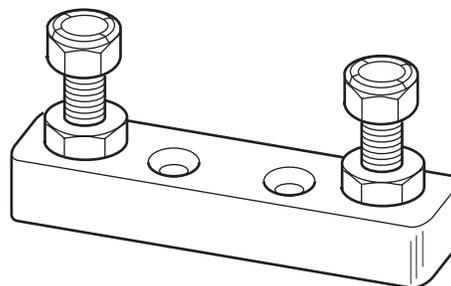

General Information:

- Very fast-acting (high speed of responses to short-circuit currents).
- An open link element is visible through a mica window.
- Stud mounts in Buss fuseblock 4164.

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.