



1/4" x 1-1/4" Fuses MDL Series, Time Delay, Glass Tube

Description

- Time delay, glass tube
- Optional leaded version available
- 1/4 x 1-1/4 (6.3mm x 32mm) physical size
- Glass tube, nickel-plated brass endcap construction
- UL Listed product meets standard 248-14

ELECTRICAL CHARACTERISTICS					
Rated Current	Amp Rating	Opening Time			
	100%	None			
1/16 - 30A	135%	60 minutes max.			
	200%	120 seconds max.			
1/16 - 3A	200%	5 seconds min.			
3-2/10 - 8A	200%	12 seconds min.			

Agency Information

- UL Listed Card: MDL 1/16 8A (Guide JDYX, File E19180)
- UL Recognized Card: MDL 9 30A (Guide JDYX2, File E19180)
- CSA Certification Card: MDA 2/10 15 (Class No. 1422-01)

Environmental Data


- Shock: 1/100A and 8/10A MIL-STD-202, Method 213, Test Condition I; 1A thru 30A – MIL-STD-202, Method 207, (HI Shock)
- Vibration: 1/100A and 8/10A MIL-STD-202, Method 201; 1/4A thru 30A – MIL-STD-202, Method 204, Test Condition C (Except 5g, 500HZ)


Ordering

Specify product code, option code and packaging code



Dimensions (mm//n) Drawing Not to Scale _____38.10 _____





SPECIFICATIONS							
Product Code	Voltage Rating		AC Interrupting Rating*		Typical DC Cold Resistance**	Typical Melting I²t†	Typical Voltage
	AC	250V	125V	32V	(ohms)	AC	Drop‡
MDL-1/16	250V	35A	10000A	-	38.000	0.0046	2.79
MDL-1/10	250V	35A	10000A	-	15.900	0.0420	1.95
MDL-1/8	250V	35A	10000A	-	9.850	0.0422	1.52
MDL-3/16	250V	35A	10000A	-	4.680	0.116	N/A
MDL-2/10	250V	35A	10000A	-	4.115	0.314	0.972
MDL-1/4	250V	35A	10000A	-	0.320	0.447	0.965
MDL-3/10	250V	35A	10000A	-	2.300	0.412	0.808
MDL-3/8	250V	35A	10000A	-	2.800	0.982	1.46
MDL-1/2	250V	35A	10000A	-	1.725	1.656	1.27
MDL-3/4	250V	35A	10000A	-	0.822	4.343	1.01
MDL-1	250V	35A	10000A	-	0.525	11.498	0.995
MDL-1-1/4	250V	100A	10000A	-	0.320	86.2	0.722
MDL-1-1/2	250V	100A	10000A	-	0.250	22.7	0.721
MDL-2	250V	100A	10000A	-	0.173	62.3	0.644
MDL-2-1/4	250V	100A	10000A	-	0.068	49.6	0.535
MDL-2-1/2	250V	100A	10000A	-	0.096	63.1	0.410
MDL-3	250V	100A	10000A	-	0.067	67.5	0.345
MDL-4	250V	200A	10000A	-	0.035	19.3	0.187
MDL-5	250V	200A	10000A	-	0.023	32.0	0.160
MDL-6	250V	200A	10000A	-	0.018	37.4	0.155
MDL-6-1/4	250V	200A	10000A	-	0.018	38.7	0.152
MDL-7	250V	200A	10000A	-	0.018	42.7	0.140
MDL-8	250V	200A	10000A	-	0.011	47.8	0.119
MDL-9	32V	-	-	1000A	0.009	51.5	0.124
MDL-10	32V	-	-	1000A	0.008	64.4	0.114
MDL-15	32V	-	-	1000A	0.006	354.0	0.130
MDL-20	32V	-	-	1000A	0.002	2914.0	0.530
MDL-25	32V	-	-	1000A	0.001	15221.0	0.30
MDL-30	32V	-	-	1000A	0.001	15581.0	0.40


- * Interrupting Ratings (Interrupting ratings were measured at 70% 80% power factor on AC)
- ** DC Cold Resistance (Measured at ≤10% of rated current)
- † Typical Melting I²t (A²Sec) (I²t was measured at listed interrupting rating and rated voltage.)
- ‡ Typical Voltage Drop (Voltage drop was measured at 25°C±3°C ambient temperature at rated current)






1/4" x 1-1/4" Fuses MDL Series, Time Delay, Glass Tube

TIME CURRENT CURVE

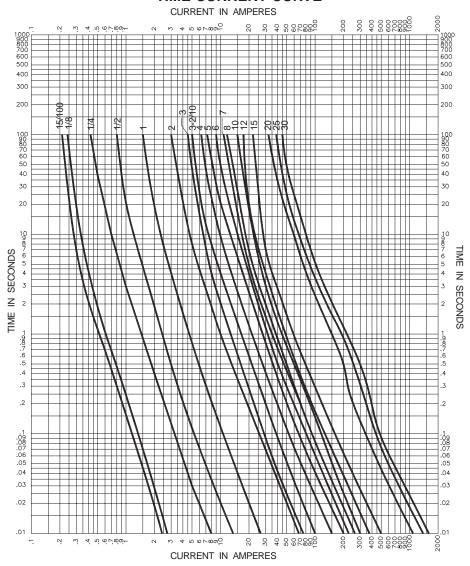

OPTION CODE		
Option Code	Description	
В	Board Washable - Hermetically sealed to withstand aqueous cleaning	
V	Axial leads - brass overcaps with copper and nickel flash, plated in tin lead	

PACKAGING CODE				
Packaging Code	Description			
BK	100 pieces of fuses packed into a cardboard carton with flaps folded			
BK1	1,000 pieces of fuses packed into a cardboard carton with flaps folded			
BK8	8.000 pieces of fuses packed into a cardboard carton with flaps folded			



OC-2546 5/02

Visit us on the Web at www.cooperET.com

© Cooper Electronic Technologies 2002 3601 Quantum Boulevard Boynton Beach, Florida 33426-8638 Tel: +1-561-752-5000 Toll Free: +1-888-414-2645 Fax: +1-561-742-1178

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.